


GENII RC250 TELEMETRY RECEIVER SYSTEM

The RC250 is a high performance telemetry receiver designed for use with the standard GENII range of telemetry transmitters, repeaters and accessories. Serial data from the RC250 is processed by the connected PC for integration into industry standard PC software such as LabVIEW, DASylab, Wonderware or proprietary software, that can include compliance to CFR21 Part 11.

Eltek
SPECIALIST
DATA LOGGERS

Easy to use customised data loggers

Radio Telemetry offers a cost effective and practical alternative to hardwired monitoring and alarm systems without forfeiting reliability, accuracy or security. The use of telemetry does not restrict the sensor type that can be used. License exempt UHF radio means low cost of ownership and long range. Unlike mesh radio Eltek telemetry radio range can be hundreds of meters without the use of nodes requiring power. Furthermore, the range can be extended to cover large areas by strategic placement of repeaters.

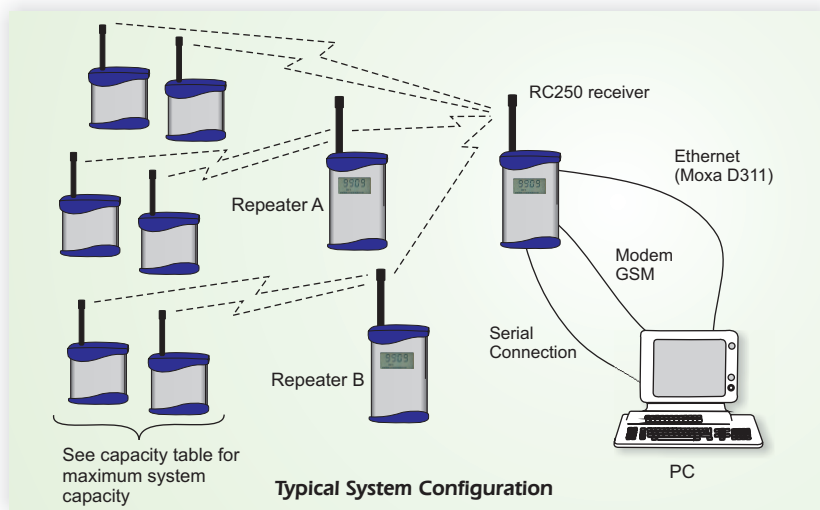

Gen II RC250 telemetry system

The RC250 is intended for use as an interface to Generic software such as DASyview, LabVIEW, Wonderware's InTouch and OEM software.

This feature rapidly realises a broad spectrum of applications including:-

- Monitoring and analysis
- Alarm and control
- Real time data
- profile mapping

For customers in the pharmaceutical sector (e.g. where CFR21 Part 11 compliance required), industrial, construction, storage, research and conservation sectors.

RC250 features

- Built in rechargeable battery pack for more than 24 hour operation should AC supply fail
- Power supply for 110 to 250VAC included
- Built in display for indicating which TX is active and associated received signal strength
- Supplied with configuration software includes set-up for authorised transmitters.
- Can be used with multiple repeaters (type RP250GD)
- SMA antenna socket for attached antenna or external antenna options
- Rugged aluminium case for free standing or wall mounting
- Polled data output on 6 pin Mini DIN socket
- For direct connection to PC or via Intranet or Ethernet using Moxa D311 adaptor option or via GSM using Eltek GSM modem kit

Transmitter features

- Sensors can be integral, external or both
- Inputs for voltage, current, light, pressure differential and weather monitoring
- Programmed from the PC
- Battery powered using standard alkaline batteries
- 5 year battery endurance (transmitter interval set to 5 minutes)
- Transmitter interval can be set from 1 sec. to 4 hours
- For full transmitter list see brochure TD1079

Repeater features

- Programmable
- Built-in rechargeable pack for more than 24 hour operation should AC fail
- Authorised transmitter list



GENII RC250 RECEIVER

Specification

Receiver frequency:	434.225Mhz , 914.5Mhz or other (contact Eltek)
Sensitivity:	-110dbm
Useable sensitivity:	-117dbm
Compliant to:	EN300 220-1
Ambient temperature:	-10 to +55°C
Humidity:	Up to 95% (non condensing)
Power supply requirements:	12V DC at 500mA
AC power supply provided:	100/250AC to 12VDC type MP12U
Built in rechargeable batteries:	7.2V (6 x NiMh 1.8Ah pack)
Battery reserve:	>24 hours
Dimensions (ex. Antenna):	D 41mm x W 80mm x H125mm
Weight:	500g inc. batteries
Antenna connector:	SMA (socket)
Data out & programming connector:	6 pin Mini Din (socket)
Data protocol:	To Eltek specification Tn102 Ver1.0

Antenna options

UHFflexi/SMA standard quarter wave whip



LW-ANT/SMA – lightweight indoor or external dipole antenna




Eltek supplied Yagi directional antenna– specified as required.



If for increased receiver sensitivity from a specific transmitter location a Yagi antenna can be used.

Receiver connections and display

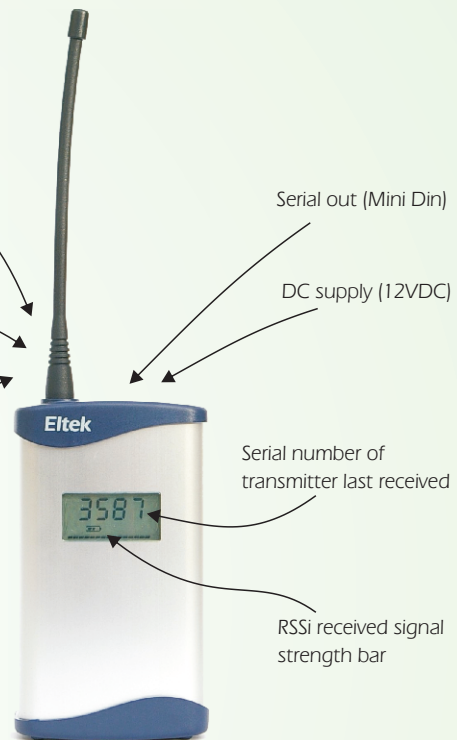

Accessories

MOXA D311 - Ethernet / internet adapter. Includes AC power supply and lead to connect to Rc250
GSM-mdm - GSM modem with antenna and lead to connect to RC250.

Distributor:



Guarantee Equipment manufactured by Eltek is guaranteed against faulty materials or workmanship for three years. For repairs carried out under guarantee, no charge is made for labour, materials or return carriage.



Eltek

Specialist Data Loggers
Eltek Ltd, 35 Barton Road, Haslingfield
Cambridge, CB23 1LL, England
Tel: +44 (0) 1223 872111
Fax: +44 (0) 1223 872521
email: sales@eltekdataloggers.co.uk
http://www.eltekdataloggers.co.uk